

June 10, 2014

▪ **TEST REPORT** ▪

PN 116192A

PO 5693

PHYSICAL TESTING DEPARTMENT

Prepared For:

CAB Products and Cambria County Association for
The Blind and Handicapped

Prepared By: 

Todd Romine
Project Technician

Approved By: 

Jim Drummond
Physical Testing, Manager



*Certificate Numbers 255.01 & 255.02

An A2LA ISO 17025 Accredited Testing Laboratory — Certificate Numbers 255.01 & 255.02
ISO 9001:2008 Registered

ISO 9001:2008
Registered

Letters and reports are for the exclusive use of the clients to whom they are addressed and shall not be reproduced, except in full, without the written permission of Akron Rubber Development Laboratory, Inc. (ARDL). The information contained herein applies to the specific material, products or processes tested or evaluated. No warranty of any kind is herein construed or implied. The liability of ARDL, Inc. shall be limited to the amount of consideration paid for services. ARDL, Inc. is ISO 17025 accredited by A2LA for the test methods listed on the attached scope.

www.ardl.com

2887 Gilchrist Rd. | Akron, Ohio 44305 | answers@ardl.com
Toll Free (800) 830-ARDL | Worldwide (330) 794-6600 | Fax (330) 794-6610

June 10, 2014

CAB Products and Cambria County Association for the Blind and Handicapped.

Page 2 of 2
PN116192A

SUBJECT: Physical testing on material submitted by the above company.
PO# 5693

RECEIVED: Two (2) slabs identified as 370-2322 Orange and 370-2412 Dk Gray.

FLAMMABILITY RESISTANCE, IEC 60695-11-10

Flame Height: 20 mm
Flame Application: 30 seconds
Specimen Size: 125 x 13 x 1.7 mm

	<u>RESULTS</u>	<u>REQUIREMENTS</u>	<u>PASS/FAIL</u>
Burn Rate mm/min. Gray	Self extinguished before timing zone	75 max.	Pass
Orange	Self extinguished before timing zone	75 max.	Pass


Note: Specimens shall be classified HB

Prepared By:



Todd Romine
Project Technician

Approved By:

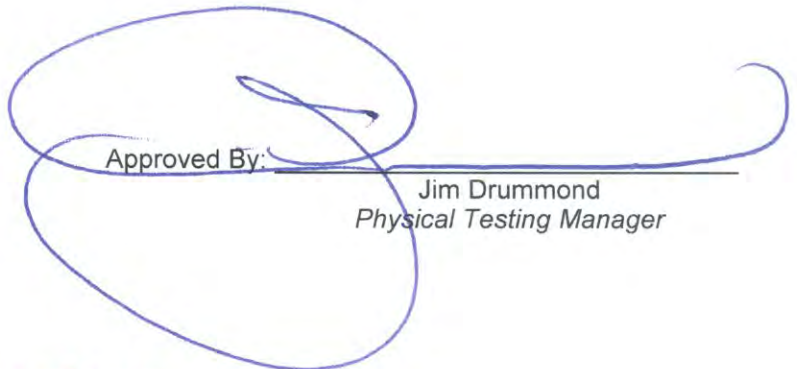

Jim Drummond
Physical Testing Manager

st

www.ardl.com

2887 Gilchrist Rd. | Akron, Ohio 44305 | answers@ardl.com
Toll Free (800) 830-ARDL | Worldwide (330) 794-6600 | Fax (330) 794-6610